

Ice pebbles 57kg/24h with 10kg bin Ice pebbles maker, air-cooled


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

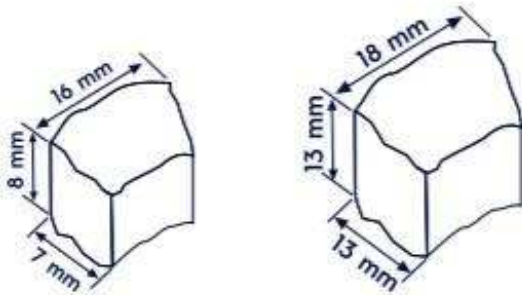
730266 (IP55B10)

Ice Pebbles Maker, 57 kg/24h, 10kg ice collection bin included, air-cooled

Short Form Specification

Item No. _____

Plastic flap on the front, top and sides in 304 AISI stainless steel.

The ice-making method guarantees low water consumption and hygienically pure ice pebbles that are resistant to melting. R290 refrigerant. Container capacity Kg: 10.

Main Features


- Air filters are easily removable and cleanable without tools.
- Height adjustable stainless steel feet.
- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- Model available in air-cooled version.
- Bin integrated as standard.
- AISI 304 stainless steel evaporator ensures a safe contact with ice.
- The water basin, sealed and hermetic is a barrier for dust and impurities.
- Reduced energy consumption by fully insulated storage bin.
- Electronic sensor continually monitors the rotation speed to ensure machine efficiency.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- CFC and HCFC free (highly ecological refrigerant type: R290).
- The ice making method guarantees a continuous and reliable production.
- Little cone shape with irregular slightly crushed sides.

Construction


- Rounded internal corners for ease of cleaning.
- Easy access to the main components for maintenance.
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- Internal ice cubes container in ABS.
- ON-OFF rocker switch.

APPROVAL: _____

Front

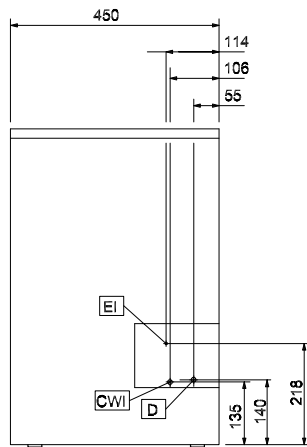


Side

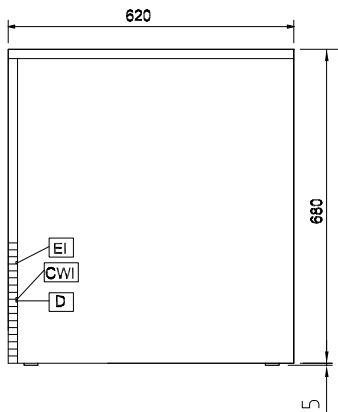

CWI1 = Cold Water inlet 1 (cleaning) WOC = Cooling water outlet
 D = Drain
 EI = Electrical inlet (power)
 WIC = Cooling water inlet

Top

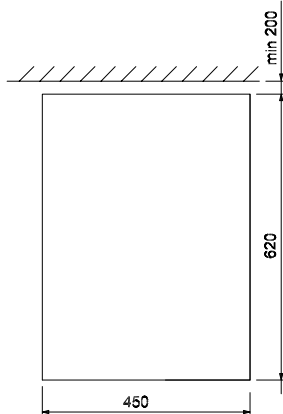

Electric

Supply voltage:

730266 (IP55B10) 220-240 V/1 ph/50 Hz

Electrical power max.:

0.41 kW

Capacity:

Bin capacity:

10 kg

Key Information:

External dimensions, Width: 450 mm

External dimensions, Depth: 620 mm

External dimensions, Height: 680 mm

Net weight: 56 kg

Output: 57 kg/day

Kind of cube:

Refrigeration Data

Refrigerant type:

R290